# OPERABLE WALLS
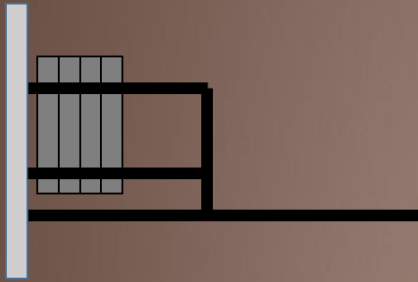# STACKING SYSTEMS
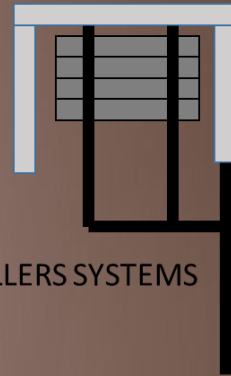
SINGLE ROLLER SYSTEMS

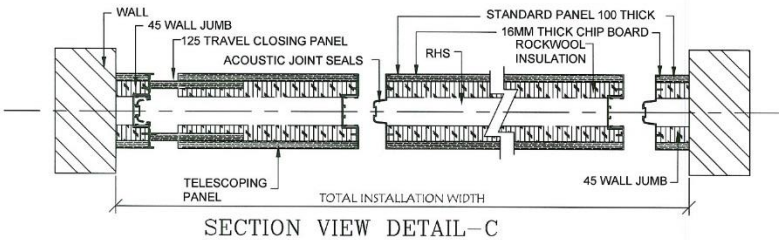DOUBLE ROLLERS SYSTEMS

DOUBLE ROLLERS SYSTEMS

DOUBLE ROLLERS SYSTEMS

## SECTION VIEW DETAIL-C

- WALL
- 45 WALL JUMB
- 125 TRAVEL CLOSING PANEL
- ACOUSTIC JOINT SEALS
- STANDARD PANEL 100 THICK
- 16MM THICK CHIP BOARD
- ROCKWOOL INSULATION
- RHS
- TELESCOPING PANEL
- TOTAL INSTALLATION WIDTH
- 45 WALL JUMB
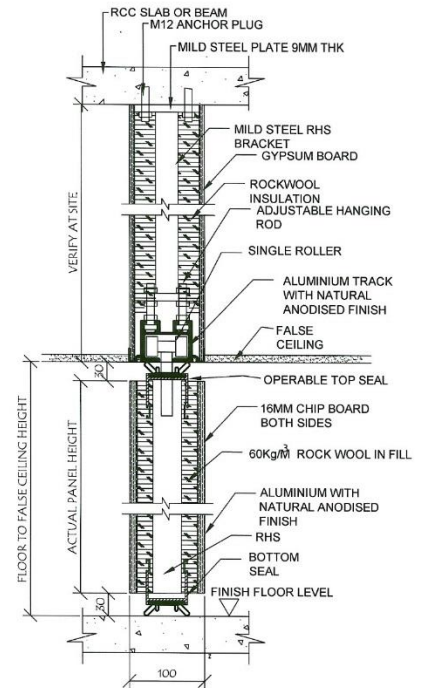
## SINGLE ROLLER
## SECTION VIEW DETAIL-B

- RCC SLAB OR BEAM
- M12 ANCHOR PLUG
- MILD STEEL PLATE 9MM THK
- MILD STEEL RHS BRACKET
- GYPSUM BOARD
- ROCKWOOL INSULATION
- ADJUSTABLE HANGING ROD
- SINGLE ROLLER
- ALUMINIUM TRACK WITH NATURAL ANODISED FINISH
- FALSE CEILING
- OPERABLE TOP SEAL
- 16MM CHIP BOARD BOTH SIDES
- 60Kg/m³ ROCK WOOL IN FILL
- ALUMINIUM WITH NATURAL ANODISED FINISH
- RHS
- BOTTOM SEAL
- FINISH FLOOR LEVEL
- VERIFY AT SITE
- FLOOR TO FALSE CEILING HEIGHT
- ACTUAL PANEL HEIGHT
- 30
- 30
- 100

MORE TECHNICAL DETAILS AVAILABLE ON REQUEST

# CREATIVE NOISE CONTROL PTE LTD